



CL420

Clamp-on Process Meter

**Measure 4 to 20mA
DC signals without
breaking the loop!**

Features:

- 0.2% Accuracy, 0.01mA Resolution
- Dual Display
- LED Torch Light, Backlight Display
- Analog Output Available



Actual size



Bulletin CL420-EN

www.yokogawa.com/yml/

YOKOGAWA ◆



CL420 Clamp-on Process Meter

● Product Model Code

Name	Model
Clamp-on Process Meter	CL420

● Standard Accessories (supplied)


Name	Model
Soft case	93045

● Optional Accessories (sold separately)

Name	Model
Output cable (banana plug)	98076
Output cable (for screw terminal)	98077

External dimensions

unit: mm

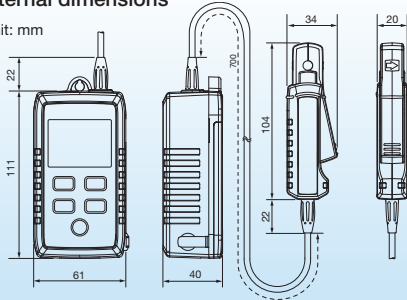

Examples of Analog Output Application

Example of 98076 output cable connecting to TY530



Example of 98077 output cable for screw terminal connecting to a data logger



Specifications

Model	CL420	
Diameter of measurable conductor	6mm diameter max.	
DC Current	Range and resolution [Range]	Accuracy ^{*1}
	20 mA: 0.00 to ±21.49mA 100 mA: ±21.0 to ±126.0mA	±(0.2%rdg+5dgt) ^{*2} ±(1.0%rdg+5dgt)
DC Voltage OUTPUT [10mV/mA]	20 mA: 0.0 to ±214.9mV 100 mA: ±210 to ±1260mV	(DCA Accuracy)+(+/-0.5mV) (DCA Accuracy)+(+/-3mV)
	Display	4-digit LCD Numeric display
Response time	Approx. 1.5 seconds (2.5 seconds when across the range)	
Range switching	Auto range	
Operating temperature and humidity	-10°C to +50°C 80% RH or less (no condensation)	
Safety Standards	EN61010-1, EN61010-2-030, EN61010-2-032	
Withstanding voltage	2.21kV AC for 5 seconds (between the core and the case)	
Power supply	Four AA-size alkaline batteries (1.5V LR6)	
Battery life	Approx. 60hrs (continuous) backlight off and LED light off	
Other functions	Data hold, Zero adjust function, Auto power off, LED Torch light, Back light display, Illuminant panel	
External dimensions and weight	61 (W) × 111 (H) × 40 (D) mm Approx. 290g (including batteries)	
Standard accessories	User's Manual, Batteries, Soft case (93045)	

*1 At 23°C ±5°C, 75% RH or less

Measurement accuracy: ±(% of reading + digits)

Terms of accuracy: Open and close the clamp sensor after power on and perform zero adjustment.


*2 The 20mA range accuracy assurance is the average of 5 times measuring.

Accessories (sold separately)

Accessories (supplied)



Output cable
Model: 98076



Output cable (for screw terminal)
Model: 98077



Soft case for CL420
Model: 93045

Related Products



Pressure Calibrator
CA700



Multi-functional Calibrator
CA150



Multi-functional Calibrator
CA71



Process Multimeter
CA450

CAUTION



- Read the product manual before using this product to ensure safe use.

YOKOGAWA TEST & MEASUREMENT CORPORATION

Global Sales Dept. /Phone: +81-422-52-6237 Facsimile: +81-422-52-6462 E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA

YOKOGAWA EUROPE B.V.

YOKOGAWA TEST & MEASUREMENT (SHANGHAI) CO., LTD.

YOKOGAWA ELECTRIC KOREA CO., LTD.

YOKOGAWA ENGINEERING ASIA PTE. LTD.

YOKOGAWA INDIA LTD.

YOKOGAWA ELECTRIC CIS LTD.

YOKOGAWA AMERICA DO SUL LTDA.

YOKOGAWA MIDDLE EAST & AFRICA B.S.C(c)

Phone: +1-800-888-6400

Phone: +31-88-4641429

Phone: +86-21-6239-6363

Phone: +82-2-2628-3810

Phone: +65-6241-9933

Phone: +91-80-4158-6396

Phone: +7-495-737-78-68

Phone: +55-11-3513-1300

Phone: +973-17-358100

Facsimile: +86-21-6880-4987

Facsimile: +82-2-2628-3899

Facsimile: +65-6241-9919

Facsimile: +91-80-2852-1442

Facsimile: +7-495-737-78-69

Facsimile: +973-17-336100

Represented by:

tmi.yokogawa.com/

YMI-VP-LF-S-EN06

The contents in this catalog is as of August 2019. Subject to change without notice.

All Rights Reserved. Copyright © 2012, Yokogawa Test & Measurement Corporation

[Ed:04/b] Printed in Japan, 908(KP)

YOKOGAWA