



Model 123L



Model 123H



EMC
EN: 61326



123/123H/123L/125/125B/127 are used to measure the moisture level in sawn timber (also cardboard, paper) and hardened materials (plaster, concrete and mortar). They display the moisture level. The instruments have an average adjustment for European wood based on a wood temperature of 20°C.

127 is 2 in 1 digital and analog moisture meter

123L is 2 in 1 digital and analog moisture meter with flashlight

Features

- Large LCD display
- Readings with Moisture Probe or Hammer Electrode
- Readings with Integral electroded Pins

Specifications

Measuring principle	Electrical resistance
Electrode length	8mm
Electrodes	Integrated, replaceable
Measuring range	Wood: 6-44%
	Material: 0.2-2.0%
Display Accuracy	Wood: ±1%
	Material: ±0.05% (127)
Battery	3 x Cr 2032, replaceables
Temperature measuring	0-60°C
Ambient temperature	0-40°C
Ambient moisture	0-85%

Size(HxWxD): 123/123L/127: 130mm x 40mm x 33mm

Weight: 99g

Size(HxWxD): 125/125B: 140mm x 48mm x 33mm

Weight: 93g



Model 125



Model 125B




replaceable pin



Calibration and battery check



Accessories :
battery, clamshell

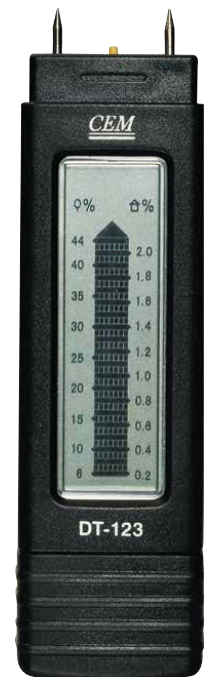

Model 123